


Crystal (CSR Model):

Aluminum Extrusion Glass Hoistway Residential Home Elevator with hydraulic cylinder at rear

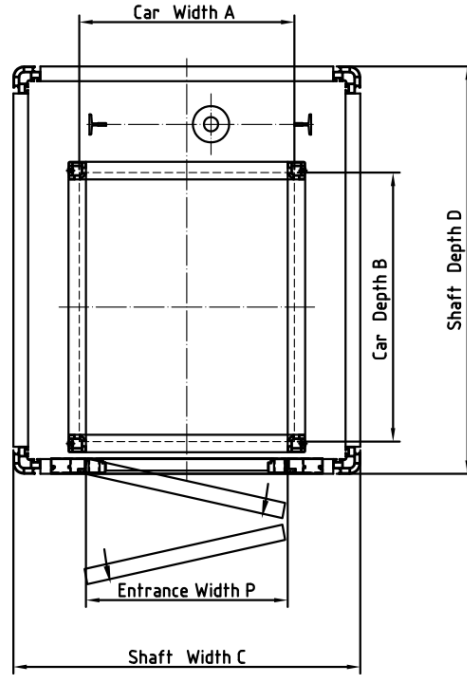

“Specifications shown are for reference only and subject to final engineering”

Model No.	Lbs. (Kg)	Car Width A ft-in (mm)	Car Depth B ft-in (mm)	Shaft Width C ft-in (mm)	Shaft Depth D ft-in (mm)	Entrance Width P ft-in (mm)	Cut out on Floor (Width x Depth) ft-in x ft-in (mm x mm)
CSR-F-53327	550 (250)	3'-3" (1000)	2'-7" (800)	4'-11" (1490)	4'-4" (1315)	3'-1" (950)	5'-1" x 4'-6" (1540 x 1365)
CSR-F-73333	705 (320)	3'-3" (1000)	3'-3" (1000)	4'-11" (1490)	5'-0" (1515)	3'-1" (950)	5'-1" x 5'-2" (1540 x 1565)
CSR-F-74127	705 (320)	4'-1" (1250)	2'-7" (800)	5'-7" (1700)	4'-4" (1315)	3'-1" (950)	5'-9" x 4'-6" (1750 x 1365)
CSR-F-84133	880 (400)	4'-1" (1250)	3'-3" (1000)	5'-7" (1700)	5'-0" (1515)	3'-1" (950)	5'-9" x 5'-2" (1750 x 1565)

Minimum Overhead: 9'-3" (2820mm) measured from the last stop finished floor level to the underside of hoistway.

Maximum Pit Depth: 4" (100mm) measured from the first stop finished floor level to the top of pit surface

Also available (please contact us for dimensions):

- Opposite (Front and Rear) entrances
- Angled (Front and Side or Rear and Side) entrances