


Crystal (CSS Model):

Aluminum Extrusion Glass Hoistway Residential Home Elevator with hydraulic cylinder at side

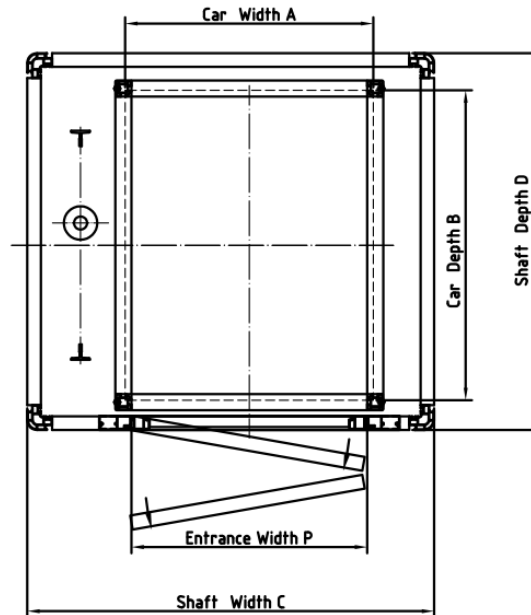

“Specifications shown are for reference only and subject to final engineering”

Model No.	Lbs. (Kg)	Car Width A ft-in (mm)	Car Depth B ft-in (mm)	Shaft Width C ft-in (mm)	Shaft Depth D ft-in (mm)	Entrance Width P ft-in (mm)	Cut out on Floor (Width x Depth) ft-in x ft-in (mm x mm)
CSS-F-53327	550 (250)	3'-3" (1000)	2'-7" (800)	5'-5" (1640)	3'-7" (1070)	3'-1" (950)	5'-7" x 3'-9" (1690 x 1120)
CSS-F-72741	705 (320)	2'-7" (800)	4'-1" (1250)	4'-9" (1440)	5'-0" (1520)	2'-5" (750)	4'-11" x 5'-2" (1490 x 1570)
CSS-F-73333	705 (320)	3'-3" (1000)	3'-3" (1000)	5'-5" (1640)	4'-2" (1270)	3'-1" (950)	5'-7" x 4'-4" (1690 x 1320)
CSS-F-83341	880 (400)	3'-3" (1000)	4'-1" (1250)	5'-5" (1640)	5'-0" (1520)	3'-1" (950)	5'-7" x 5'-2" (1690 x 1570)

Minimum Overhead: 9'-3" (2820mm) measured from the last stop finished floor level to the underside of hoistway.

Maximum Pit Depth: 4" (100mm) measured from the first stop finished floor level to the top of pit surface

Also available (please contact us for dimensions):

- Opposite (Front and Rear) entrances
- Angled (Front and Side or Rear and Side) entrances